



产品承认书

SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

ES2G063510H

我司品名:

OUR PART NAME

Lan Transformer

送样日期:

DATE SAMPLES

数量:

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
Hufangting	RaoPing	ZhongCuilan

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

ES2G063510H

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

Email: dgxiangru@126.com

产品承认书


SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2025/05/20
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	ES2G063510H
我司物料编号 OUR PART NO	ES2G063510H	我司品名 OUR PART NAME	Lan Transformer

Parametertable(特性参数):

Part No	OCL(uH min) @100KHz/0.1Vrms 8mA DC BIAS	Turns Ratio(5%)	Insertion Loss(dB) Max		Return Loss(dB) *Z OUT=100 OHM ±1%	
			1~100MHz	100~125MHz	1~40MHz	40~125MHz
ES2G063510H	180uH	1:1	-1.0dBMAX	-1.5dBMAX	-16	-16+10LOG(f/40)dBMin
Part No	Cross Talk (dB MIN)MHz		CMRR (dB MIN)MHz		Isolation Voltage(AC Vrms)	
	1-125MHz		1-125MHz		1mA 60s	
ES2G063510H	-30dB Min		-30dB Min		1500Vrms	

MECHANICAL(外观尺寸图):

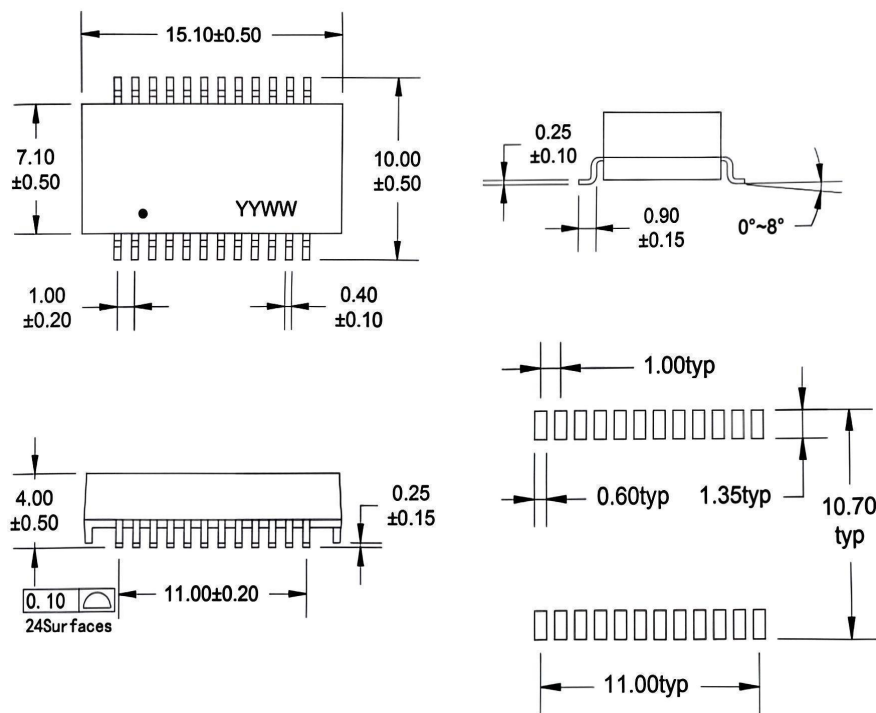

1特点Features:


- 1.1: 符合IEEE 802.3af和ANSIX3.263标准。Meets IEEE 802.3af and ANSIX3.263 standards
- 1.2: • 2.5GBase-T, 表面贴装类型, 开放式接头。2.5GBase-T, Surface Mount Type, Open Header
- 1.3: 工作温度范围:0℃至+70℃。Operating temperature range: 0℃ to +70℃
- 1.4: 存储温度范围:-40℃至+85℃。Storage temperature range: -40℃ to +85℃

产品承认书


SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2025/05/20
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	ES2G063510H
我司物料编号 OUR PART NO	ES2G063510H	我司品名 OUR PART NAME	Lan Transformer

SCHEMATICS (原理图) :

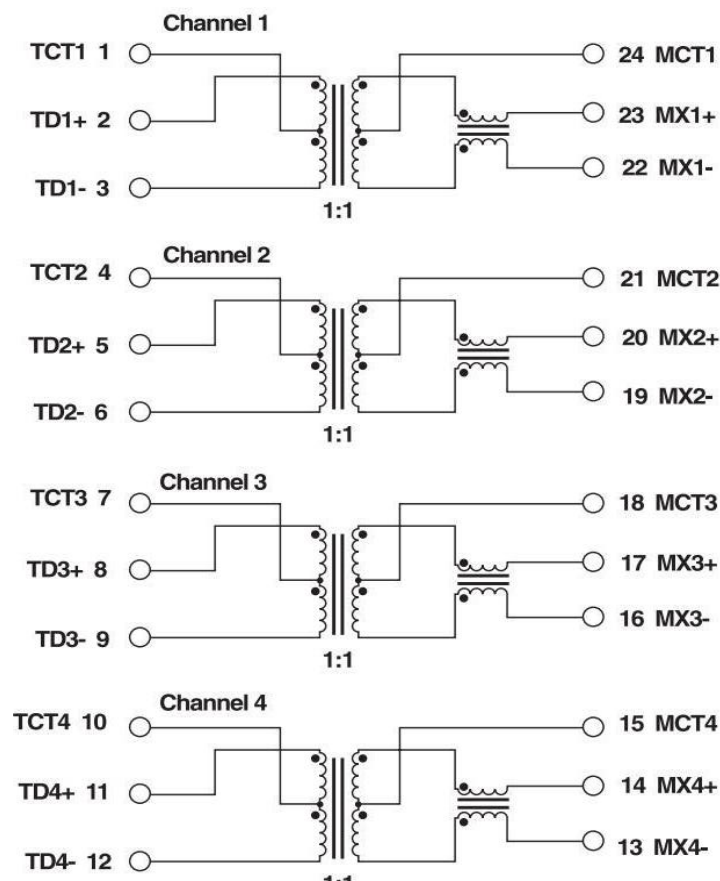

Packaging information:

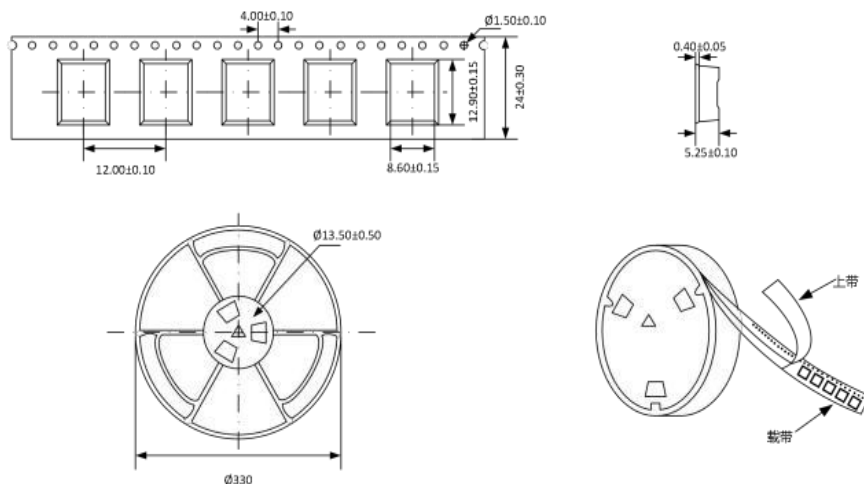

※ Unit: mm

※ Packaging quantity (MOQ): * pcs/roll * pcs/box