



产品承认书 SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XREE16-250410

我司品名:

OUR PART NAME

Transformer

送样日期:

DATE SAMPLES

数量:

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
Hufangting	RaoPing	ZhongCuilan

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

EE16 vertical 4+4 2.2mH

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市样如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

Email: dgxiangru@126.com



修订记录 Revision record

[illegible]


产品承认书

SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2025/1/17
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	EE16 vertical 4+4 2.2mH
我司物料编号 OUR PART NO	XREE16-250410	我司品名 OUR PART NAME	Transformer

一、外观尺寸 Appearance of size

单位 Unit: mm

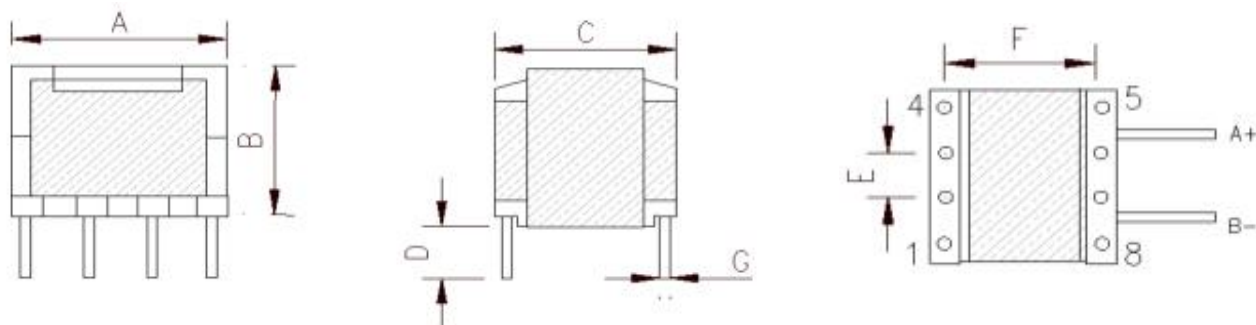


A	B	C	D	E	F	G	
18.0max	16.0max	19.0max	4.0±0.5	4.0±0.3	14.0±0.5	0.65±0.1	

(以上尺寸为手工测量只做参考详细尺寸以实物为准) (The above dimensions are measured by hand for reference only. The detailed dimensions are subject to the physical objects.)

NOTE:

- 成品漆真空浸油烘干处理; Vacuum dipping and drying of finished paints.
- 骨架空5.6.7.8脚, 4脚剪余头; Skeleton empty 5.6.7.8 feet, 4 feet cut head.
- 成品沿磁芯方向包0.025*5*73mm自粘铜箔1.1TS (铜箔必须直接接触磁芯), 引线接3脚, 再包10mm胶带3TS, 最后沿线包包16mm胶带3TS; Finished product along the core direction package 0.025 * 5 * 73mm self-adhesive copper foil 1.1TS (copper foil must be in direct contact with the core), lead to the 3 feet, and then wrapped in 10mm tape 3TS, and finally along the line package package 16mm tape 3TS.
- A+、B-为飞线, 从5.8脚边顶部飞出, 飞线长30±5mm, 焊锡5±2mm, A+加白色铁氟龙套管, B-加黑色特氟龙套管; A+, B- for the flywire, from the top of the 5.8 feet edge fly out, flywire length 30 ± 5mm, solder 5 ± 2mm, A + plus white Teflon casing, B- plus black Teflon casing.
- 成品需二次焊锡; Finished product requires secondary soldering.
- 顶部标签; top label. 丝印 marking: EE16W-01, Datecod 周期;

电路图 wiring diagram:





产品承认书
SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER				日期 DATE		2025/1/17			
客户物料编号 CUSTOMER P/N				客户规格型号 DESCRIPTION		EE16 vertical 4+4 2.2mH			
我司物料编号 OUR PART NO		XREE16-250410		我司品名 OUR PART NAME		Transformer			
绕线结构 /WINDING STRUCTURE:									
WDG	Pin S--F	Material	Turns	Tape	挡墙 PIN TOP		套管 S F		备注note
N1	2-4	2UEW ϕ 0.28*1P	50TS	2TS	/	/			密绕 winding
N2	(白) A+--B- (黑)	TEX-E ϕ 0.3*1P	44TS	2TS	/	/			
N3	(T) 4--1	2UEW ϕ 0.28*1P	50TS	2TS	/	/			
电气性能 /ELECTRICAL PROPERTIES (at 25℃)):									
Chathan packet	2UEW ϕ 0.28*1P			technical					
	TEX-E ϕ 0.3*1P			电感量 : L2-- 1=2.2mH \pm 7%					
	0.025*5*73mm铜箔			测试条件 : 1KHZ 0.3V					
				耐压 : P- S 3750V/5mA/60S					
				S -C 3750V/5mA/60S					
骨架: EE16W(4+4) 立式 Skeleton: EE16W(4+4) vertical type									
胶带颜色: 淡黄色 Tape color: light yellow									
材料表 /MATERIAL LIST:									
NO.	名称 ITEM	型号 TYPE	UL RATING	制造商 SUPPLERS				UL NO.	
1	CORE	EE16W/PC40	/	HAINING WANLI ELECTRONICS CO.,LTD				N/A	
2	BOBBIN	PHENOLIC T375HF	94V0 150℃	CHANG CHUN PLASTICS CO LTD				E59481	
3	WIRE	2UEW 94V-0	QA-155℃	WU HU COPPER CORWN ELECTRICIAN LTD				E326270	
4	TAPE	JY312Y	130℃	SUZHOU MAILADUONA ELECTRIC MATERIAL CO LTD				E188295	
5	TIN	无铅107H	420℃	THOUSAND ISLAND METAL FOIL Co.,LTD.				N/A	
6	VARNISH	1032CJJ	155℃	QUALIPOLY CHEMICAL CORP				E213437	
7	TRIPLE WIRE	TIW-B	130℃	SHENZHEN HEDONG NEW MATERIAL CO LTD				VDE40038661	
制表 MADE		审核 CHECKED	批准 APPROVED						
Hufangting		RaoPing	ZhongCuilan						



注意事项 Matters needing attention

1、本公司产品适用于 AV 设备、OA 设备、家电、信息服务等一般电子设备中。

Our products are designed and promoted for use in general electronic devices such as audio-video equipment, office automation equipment, home appliance and information service.

2、当本公司的产品使用在一般电子设备以外的领域时，对于此所引发的设备失效我司将不承担任何法律责任。

In case of using the product for the purpose other than general electronics devices, we shall not be held liable for any dysfunctions in or damage to the equipment with which the product is used.

3、本承认书只保证我司产品作为一个单体时的质量情况，当我司产品被安装到贵司产品上时，请贵司对使用在贵司电路上的产品情况进行了有效评价和确认。

Our specification limits the quality of the component as a single unit. Please ensure the component is thoroughly evaluated in your application circuit.

4、不要对产品施加过大的振动或机械冲击；

Do not apply excessive vibration or mechanical shock to products.

5、为防止断线，请不要使用锋利的物体接触线圈，如镊子；

Do not touch wire with sharp objects such as tweezers to prevent wire breakage.

6、在产品贴装时不要使用过大的压力，避免磁芯断裂。

Do not apply excessive stress to products mounted on boards to prevent core breakage.

7、为保证端子电极的焊接特性和包装材料处于良好状态，请于本公司发货后 6 个月内使用本产品。同时，由于端子电极的焊接特性会随时间发生变化，如果贮存时间超过 6 个月，请首先确认其焊接特性后再安装使用。

To maintain the solderability of terminal electrodes and to keep the packing material in good condition, product should be used within 6 months from the time of delivery. And the solderability of products electrodes may decrease as time passes, so in case of storage over 6 months, solderability shall be checked before actual usage.

8、存放货物的仓库应满足以下条件 Store products in a warehouse in compliance with the following condition:

条件 Conditions	元件含包装物 Packing status	元件自身 Component itself
温度 Temperature	-25~+40℃	-25~+85℃
湿度 Humidity	30~70%RH	30~70%RH

9、不要使产品遭受温度和湿度的快速变化。

Do not subject products to rapid changes in temperature and humidity.

10、不要将产品存放在化学环境中，如硫酸气体或碱性气体中，否则会降低电极端子的焊接特性和使电感器腐蚀。

Do not store the products in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas, that will causes poor solderability and corrosion of inductors.

11、为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。

Store products on pallets to protect from humidity, dust, etc

12、产品应避免热冲击、振动以及直接光照等等。

Avoid heat shock, vibration, direct sunlight, etc.