



产品承认书

SPECIFICATION FOR APPROVAL

客户名称:
CUSTOMER

我司料号:
OUR PART NO.

XRFS20.5*3.5*15-0.8

我司品名:
OUR PART NAME

Magnetic bead transformer

送样日期:
DATE SAMPLES

数量:
QUANTITY

0PCS

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
Hufangting	Raoping	Lizhengxiong

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION: FS20.5*3.5*15-0.8

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgement, please put forward or mark it and send it to our company. This acknowledgement will take effect one week after it is provided if you do not receive an objection reply.

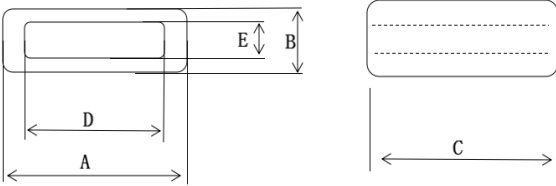
东莞市祥如电子有限公司

Dongguan xiangru electronics co., ltd

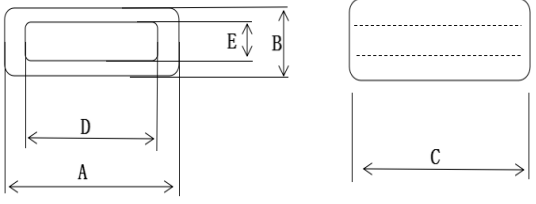
Tel: 0769-86346548 Fax: 0769-86346358

e-mail: dgxiangru@126.com

SPECIFICATION FOR APPROVAL

CUSTOMER :		DARE:2022/6/16																																				
ITEM : XRFS20.5*3.5*15-0.8		CUSTOMER'S PART NO :																																				
(1) SHAPE : 		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">A</td> <td style="width: 15%;">20.50</td> <td style="width: 10%;">±</td> <td style="width: 15%;">0.70</td> <td style="width: 10%;">m/m</td> </tr> <tr> <td>B</td> <td>3.50</td> <td>±</td> <td>0.40</td> <td>m/m</td> </tr> <tr> <td>C</td> <td>15.00</td> <td>±</td> <td>0.60</td> <td>m/m</td> </tr> <tr> <td>D</td> <td>16.50</td> <td>±</td> <td>0.60</td> <td>m/m</td> </tr> <tr> <td>E</td> <td>0.80</td> <td>±</td> <td>0.30</td> <td>m/m</td> </tr> <tr> <td>F</td> <td></td> <td>±</td> <td></td> <td>m/m</td> </tr> <tr> <td>G</td> <td></td> <td>±</td> <td></td> <td>m/m</td> </tr> </table>		A	20.50	±	0.70	m/m	B	3.50	±	0.40	m/m	C	15.00	±	0.60	m/m	D	16.50	±	0.60	m/m	E	0.80	±	0.30	m/m	F		±		m/m	G		±		m/m
A	20.50	±	0.70	m/m																																		
B	3.50	±	0.40	m/m																																		
C	15.00	±	0.60	m/m																																		
D	16.50	±	0.60	m/m																																		
E	0.80	±	0.30	m/m																																		
F		±		m/m																																		
G		±		m/m																																		
(2) ELECTRICAL REQUIREMENTS: Z1= 30 OHM MIN AT 25 MHz Z2= 95 OHM MIN AT 100 MHz																																						
(3) TEST INSTRUMENTS: (a) IMPEDANCE ANALYZER : <u>* HP - 4191A</u> (b) TEST FIXTURE : HP - 16092A (c) TEST CONDITION : <u>0.65</u> Φ × <u>120m/m</u> × <u>0.5</u> Ts																																						
(4) APPEARANCE: (1) AREA OF BREAK : . 缺损面积 <1.5 m/m2 (2) DEPTH OF BREAK : 缺损深度 <1.0 m/m2 (3) ONE SPOT UNDER : 1个斑点面积 <1.0 m/m2 (4) ONE SPOT UNDER : 2个斑点面积 <1.5 m/m2																																						
(5) REMARK:																																						
	test	check	approve																																			
	Fanjing	Liyan	Chenrongbing																																			

INSPECTION DATA

CUSTOMER								
PART NO.								
ITEM	XFFS20. 5*3. 5*15-0. 8							
ISSUE NO.								
Q' TY	5 Pcs							
TEMP	25°C	RH	5*3. 5*1					
LOT NO.								
ELECTRIC CHARACTER				DIME - NSION (Unit : mm)				
Meas. Item.	Z1 (OHM)	Z2 (OHM)		A	B	C	D	E
Spec. /Suggest.	30	95		20. 50	3. 50	15. 00	16. 50	0. 80
	MIN	MIN		±0. 7	±0. 4	±0. 6	±0. 6	±0. 3
Test Freq.	25MHZ	100MHZ						
1	40	128		20. 42	3. 51	15. 02	16. 42	0. 78
2	41	127		20. 39	3. 45	15. 08	16. 45	0. 76
3	41	125		20. 51	3. 48	15. 03	16. 44	0. 72
4	40	128		20. 45	3. 46	15. 02	16. 45	0. 80
5	42	126		20. 52	3. 52	15. 04	16. 48	0. 79
6								
7								
8								
9								
10								
X	41	127		20. 46	3. 48	15. 04	16. 45	0. 77
R	2	3		0. 13	0. 07	0. 06	0. 06	0. 08
TEST INSTRUMENTS & CONDITION : (a) IMPEDANCE ANALYZER: * HP - 4191A TEST FIXTURE: HP - 16092A TEST FREQ: Z1 // AT 25 MHz , Z2 // AT 100 MHz Z3 // AT _ MHz (b) LCR METER: CH - 100 ; TEST FIXTURE: HP - 16047A L // AT _____ KHz _____ V; Q // AT _____ (KHz, MHZ) (c) Q METER : HP 4342A (d) WINDING : 0. 65 ϕ × 120m/m × 0. 5 TS								

XFFS20. 5*3. 5*15-0. 8

