



产品承认书

SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRPQ20-250404

我司品名:

OUR PART NAME

Transformer

送样日期:

DATE SAMPLES

数量:

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
Hufangting	RaoPing	ZhongCuilan

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

PQ20 vertical 6+8 315uH

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

Email: dgxiangru@126.com



修订记录 Revision record

[illegible]


产品承认书

SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2025/1/17
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	PQ20 vertical 6+8 315uH
我司物料编号 OUR PART NO	XRPQ20-250404	我司品名 OUR PART NAME	Transformer

一、外观尺寸 Appearance of size

单位 Unit: mm

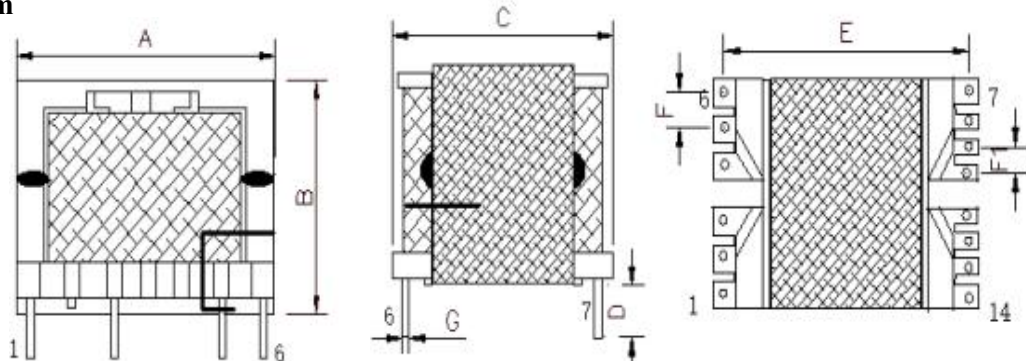


A	B	C	D	E	F	F1	G
24.5max	19.0max	25.0max	3.5±0.5	20.5±0.5	3.8±0.3	2.5±0.3	0.6±0.1

(以上尺寸为手工测量只做参考详细尺寸以实物为准) (The above dimensions are measured by hand for reference only. The detailed dimensions are subject to the physical objects.)


NOTE:

- 骨架为PQ2016立式6+8带底壳 (FC-PQ2005), 空PIN4.8.9.11.13脚, 成品剪PIN2脚2/3, PIN朝机台左顺转绕制; 绕绕N2前在PIN1-6脚处加一块L反折胶带, 待绕完N2折回包入线包内; Skeleton for the PQ2016 vertical 6 + 8 with bottom shell (FC-PQ2005), empty PIN4.8.9.11.13 feet, finished cut PIN2 feet 2/3, PIN towards the machine left clockwise rotation winding; Winding N2 before the winding of the PIN1-6 feet plus a piece of L reverse folding tape, to be folded back to wrap the line package after the winding N2.
- 磁芯继胜PQ2116, 材质PC95, 磁芯需开气隙, 气隙装于顶部; PIN5脚接地 (如图); 磁芯胶带用8.6mm包2圈固定后产品底部装壳; Core Jisheng PQ2116, material PC95, core need to open the air gap, air gap installed in the top; PIN5 feet grounded (as shown); core tape with 8.6mm package 2 circles fixed after the bottom of the product shells.
- 磁芯中柱点软胶; 磁芯结合处点硬胶固定; 成品磁芯用15mm胶带包2圈; The core center column is dotted with soft glue; the core bond is fixed with hard glue; the finished core is wrapped with 15mm tape for 2 turns.
- 产品真空含浸处理; 产品胶带颜色为淡黄色; 成品需二次焊锡; AGT-PQ2016-1000-FLM40; Vacuum impregnation treatment of the product; the color of the product tape is light yellow; the finished product needs to be soldered twice; AGT-PQ2016-1000-FLM40.
- 产品标签贴于脚顶部, 内容: Product label affixed to the top of the foot, contents: Marking 丝印; AGT-PQ2016-1000-FLM40; Datecod周期.

SCHEMATLC:



CONNECT:





产品承认书
SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER				日期 DATE		2025/1/17			
客户物料编号 CUSTOMER P/N				客户规格型号 DESCRIPTION		PQ20 vertical 6+8 315uH			
我司物料编号 OUR PART NO		XRPQ20-250404		我司品名 OUR PART NAME		Transformer			
绕线结构 /WINDING STRUCTURE:									
WDG	Pin S—F	Material	Turns	Tape	挡墙 PIN TOP		套管 S F		备注note
N1	3-2	2UEW Φ 0.32mm*1P	21TS	2TS*8.6mm	/	/			密绕 winding
N2	14-12	TIW-B Φ 0.50mm*1P	20TS	2TS*8.6mm	/	/	21L*12mm	21L*12mm	
N3	2-1	2UEW Φ 0.32mm*1P	17TS	2TS*8.6mm	/	/			
N4	6-5	2UEW Φ 0.18mm*2P	6TS	2TS*8.6mm	/	/			
N5	10-7	TIW-B Φ 0.2mm*2P	6TS	2TS*8.6mm	/	/	21L*12mm	21L*12mm	
电气性能 /ELECTRICAL PROPERTIES (at 25℃)):									
半测电感 at 10KHZ 0.3V Half Measured Inductance at 10KHZ 0.3V				耐压测试 Pressure resistance test	绝缘电阻测试at DC500V Insulation resistance testat DC500V		圈数测试at 20KHZ 1V Lap Testat 20KHZ 1V		DCR测试25℃ DCR test 25° C
foot position	minimum value	midpoint	maximum values						
3-1	303uH	315uH	327uH	P-S:3.75KV AC, 50Hz, 5mA, 3S	P-S:100MΩ MIN		3-1:38TS		/
漏感测试 at 10KHZ 0.3V 短路其它脚Leakage Inductance Test at 10KHZ 0.3V Shorted Other Pins				P-C:1.50KV AC, 50Hz, 5mA, 3S	P-C:100MΩ MIN		14- 12:20TS±0.5		
3-1		uH MAX		C-S:3.75KV AC, 50Hz, 5mA, 3S	S-C:100MΩ MIN		10-7:6TS±0.3		
成测电感 at 10KHZ 0.3V Measured Inductance at 10KHZ 0.3V							6-5:6TS±0.3		
foot position	minimum value	midpoint	maximum values	电弧侦测 arc detection	PIN短路测试 PIN short circuit test				
3-1	301uH	315uH	329uH						
					PIN3- -4 4				
材料表 /MATERIAL LIST:									
NO.	名称 ITEM	型号 TYPE	UL RATING	制造商 SUPPLERS				UL NO.	
1	CORE	PQ20	/	HAINING WANLI ELECTRONICS CO.,LTD				N/A	
2	BOBBIN	PHENOLIC T375HF	94V0 150℃	CHANG CHUN PLASTICS CO LTD				E59481	
3	WIRE	2UEW 94V-0	QA-155℃	WU HU COPPER CORWN ELECTRICIAN LTD				E326270	
4	TAPE	JY312Y	130℃	SUZHOU MAILADUONA ELECTRIC MATERIAL CO LTD				E188295	
5	TIN	无铅107H	420℃	THOUSAND ISLAND METAL FOIL Co.,LTD.				N/A	
6	VARNISH	1032CJJ	155℃	QUALIPOLY CHEMICAL CORP				E213437	
7	TRIPLE WIRE	TIW-B	130℃	SHENZHEN HEDONG NEW MATERIAL CO LTD				VDE40038661	
制表 MADE		审核 CHECKED	批准 APPROVED						
Hufangting		RaoPing	ZhongCuilan						

注意事项 Matters needing attention

1、本公司产品适用于 AV 设备、OA 设备、家电、信息服务等一般电子设备中。

Our products are designed and promoted for use in general electronic devices such as audio-video equipment, office automation equipment, home appliance and information service.

2、当本公司的产品使用在一般电子设备以外的领域时，对于此所引发的设备失效我司将不承担任何法律责任。

In case of using the product for the purpose other than general electronics devices, we shall not be held liable for any dysfunctions in or damage to the equipment with which the product is used.

3、本承认书只保证我司产品作为一个单体时的质量情况，当我司产品被安装到贵公司产品上时，请贵司对使用在贵司电路上的产品情况进行了有效评价和确认。

Our specification limits the quality of the component as a single unit. Please ensure the component is thoroughly evaluated in your application circuit.

4、不要对产品施加过大的振动或机械冲击；

Do not apply excessive vibration or mechanical shock to products.

5、为防止断线，请不要使用锋利的物体接触线圈，如镊子；

Do not touch wire with sharp objects such as tweezers to prevent wire breakage.

6、在产品贴装时不要使用过大的压力，避免磁芯断裂。

Do not apply excessive stress to products mounted on boards to prevent core breakage.

7、为保证端子电极的焊接特性和包装材料处于良好状态，请于本公司发货后 6 个月内使用本产品。同时，由于端子电极的焊接特性会随时间发生变化，如果贮存时间超过 6 个月，请首先确认其焊接特性后再安装使用。

To maintain the solderability of terminal electrodes and to keep the packing material in good condition, product should be used within 6 months from the time of delivery. And the solderability of products electrodes may decrease as time passes, so in case of storage over 6 months, solderability shall be checked before actual usage.

8、存放货物的仓库应满足以下条件 Store products in a warehouse in compliance with the following condition:

条件 Conditions	元件含包装物 Packing status	元件自身 Component itself
温度 Temperature	-25~+40℃	-25~+85℃
湿度 Humidity	30~70%RH	30~70%RH

9、不要使产品遭受温度和湿度的快速变化。

Do not subject products to rapid changes in temperature and humidity.

10、不要将产品存放在化学环境中，如硫酸气体或碱性气体中，否则会降低电极端子的焊接特性和使电感器腐蚀。

Do not store the products in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas, that will causes poor solderability and corrosion of inductors.

11、为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。

Store products on pallets to protect from humidity, dust, etc

12、产品应避免热冲击、振动以及直接光照等等。

Avoid heat shock, vibration, direct sunlight, etc.