



# 产品承认书

## SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRPQ2918J-6R8M

我司品名:

OUR PART NAME

PQ inductor

送样日期:

DATE SAMPLES

数量:

QUANTITY

### 制造确认 MANUFACTURER APPROVE

| 拟制 DRAWN    | 审核 CHECKED | 确认 APPROVED  |
|-------------|------------|--------------|
| Hu Fangting | RaoPing    | LiZhengxiong |

### 客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

PQ2918J 6.8uH  $\pm 20\%$  46A

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

Email: dgxiangru@126.com


# 产品承认书

## SPECIFICATION FOR APPROVAL

|                        |                |                       |                        |
|------------------------|----------------|-----------------------|------------------------|
| 客户名称<br>CUSTOMER       |                | 日期<br>DATE            | 2025/2/20              |
| 客户物料编号<br>CUSTOMER P/N |                | 客户规格型号<br>DESCRIPTION | PQ2918J 6.8uH ±20% 46A |
| 我司物料编号<br>OUR PART NO  | XRPQ2918J-6R8M | 我司品名<br>OUR PART NAME | PQ inductor            |

外观尺寸 Appearance of size:



单位 Unit: mm

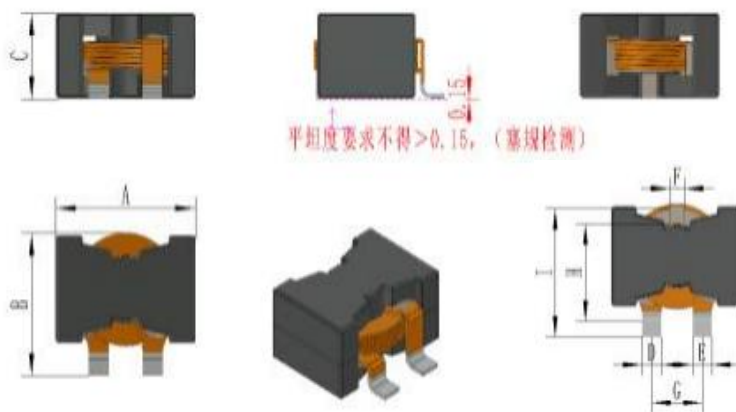

| A       | B       | C       | D       | E       | F       | G        | H        |  |   |
|---------|---------|---------|---------|---------|---------|----------|----------|--|---|
| 28.0MAX | 27.0MAX | 18.8MAX | 4.0±0.3 | 4.0±0.3 | 3.0±0.3 | 10.5±0.5 | 18.5±0.5 |  | / |

2. Schematic 原理图:

3. 焊接图RECOMMENDED PCB LAYOUT:

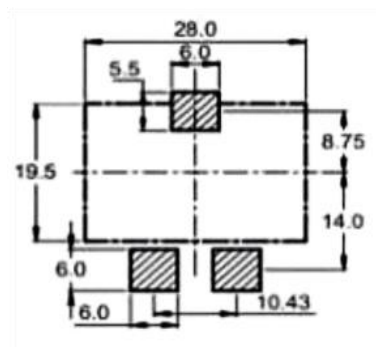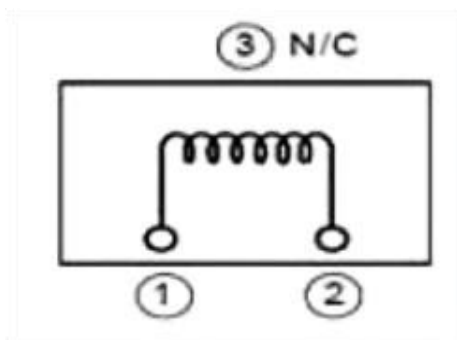

4. Features:特点:

(1) 装配设计, 结构坚固。

Assembly design, solid structure.

(2) 高电感、大电流、低磁损耗、低ESR、小寄生电容。High inductance, large current, low magnetic loss, low ESR and small parasitic capacitance.

(3) 升温电流和饱和电流受环境影响较小。The heating current and saturation current are less affected by the environment.

(4) 工作温度: -40~+125 (含线圈温升)。Working temperature: -40~+125 (including coil temperature rise).



# 产品承认书

## SPECIFICATION FOR APPROVAL



|                        |                |                       |                        |
|------------------------|----------------|-----------------------|------------------------|
| 客户名称<br>CUSTOMER       |                | 日期<br>DATE            | 2025/2/20              |
| 客户物料编号<br>CUSTOMER P/N |                | 客户规格型号<br>DESCRIPTION | PQ2918J 6.8uH ±20% 46A |
| 我司物料编号<br>OUR PART NO  | XRPQ2918J-6R8M | 我司品名<br>OUR PART NAME | PQ inductor            |

### 电性能参数. ELECTRICAL REQUIREMENTS:

| Part Number<br>型号 | Inductance (uH)<br>电感量 At<br>100KHz/0.25V | 精度<br>precision<br>(±) | 直流电阻<br>DCR (mΩ) Max | Saturation<br>current(A)<br>饱和电流 | Temperature<br>rise current (A) 温<br>升电流 |
|-------------------|-------------------------------------------|------------------------|----------------------|----------------------------------|------------------------------------------|
| XRPQ2918J-6R8M    | 6.8                                       | 20%                    | 2.5                  | 46                               | 30                                       |

Reflow soldering profile:

Saturation current VS temperature rise current curve:

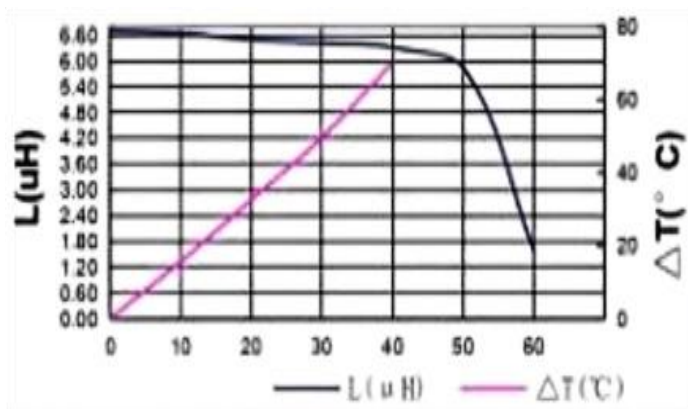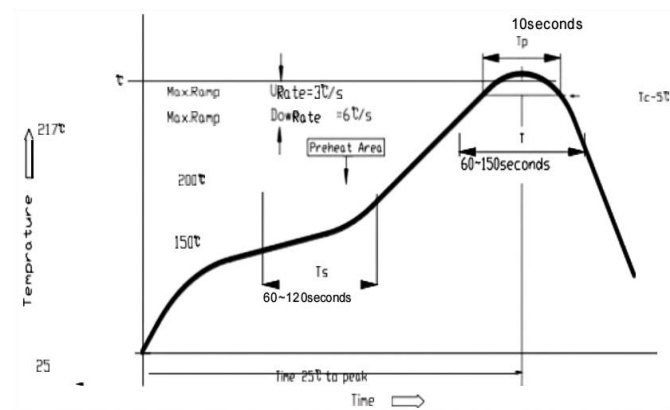

### CHARACTERISTICS 特点:

- 1). 所有测试数据基于25° C的环境温度. All test data is based on 25°C ambient.
- 2). 直流电流 (安培), 将导致近似AT40°C. DC current(A) that will cause an approximate  $\Delta T$ 40°C
- 3). 直流电流 (A), 将导致L0下降约30%典型值. DC current(A) that will cause L0 to drop approximately 30%Typ
- 4). 工作温度范围:-40C~+125°C. Operating temperature range: -40°C~+125°C
- 5). 在最坏情况下, 零件温度(环境温度+温升)不应超过125C。电路设计、元件。PWB走线尺寸和厚度、气流和其他冷却装置都会影响零件温度。应在den应用程序中验证零件温度. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions. circuit design, component. PWB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the den application

|             |            |              |  |
|-------------|------------|--------------|--|
| 制表 MADE     | 审核 CHECKED | 批准 APPROVED  |  |
| Hu Fangting | Rao0ing    | LiZhengxiong |  |