



# 产品承认书 SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRRH3.5\*3.5\*1.8

我司品名:

OUR PART NAME

Anti-EMI ferrite core

送样日期:

DATE SAMPLES

数量:

QUANTITY

## 制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
Hu Fangting	Rao Ping	Li Zhenxiong

## 客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION: RH3.5\*3.5\*1.8

检查结果:  合格  不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司


DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

Mailbox: dgxiangru@126.com

## 产品承认书


### SPECIFICATION FOR APPROVAL

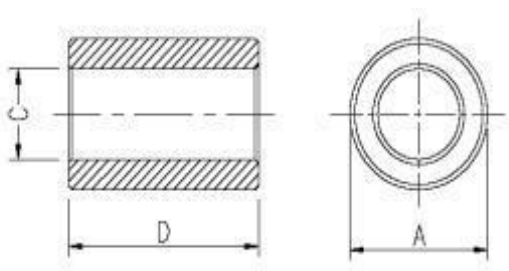详述give exact information			符合accord with		
客户client		表号 second name	3 (1)		
品名name of an article	<b>Anti-EMI ferrite core</b>	样品名称 sample name	XRRH3.5*3.5*1.8		
批号batch number					
<b>1 产品标识 product identification</b>					
<p><b>XRRH 3.5 * 3.5 *1.8</b></p> <p style="margin-left: 100px;">1      2      3      4</p> <p>(1) 型号model                      (2) 外径 outside diameter</p> <p>(3) 高度 height                      (4) 内径inner diameter</p>					
<b>2 尺寸measure</b>	<b>配置 deploy</b>	<b>产品图片Product pic</b>	NO	尺寸measure (mm)	
			A	3.5	±0.15
			B		
			C	1.8	±0.12
			D	3.50	±0.2
			E		
			<b>3. 电气性能测试指标Electrical performance test indicators</b>		
	No.	特点characteristic			
		频率frequency	阻抗impedance		
	1	25 MHz	20Ω Min.		
	2	100 MHz	60Ω Min.		

## 产品承认书 SPECIFICATION FOR APPROVAL

详述give exact information			符合accord with
客户client		表号 second name	3 (1)
品名name of an article	Anti-EMI ferrite core	样品名称 sample name	XRRH3.5*3.5*1.8
批号batch number			

8 阻抗与频率的特性曲线 Characteristic curve of impedance and frequency

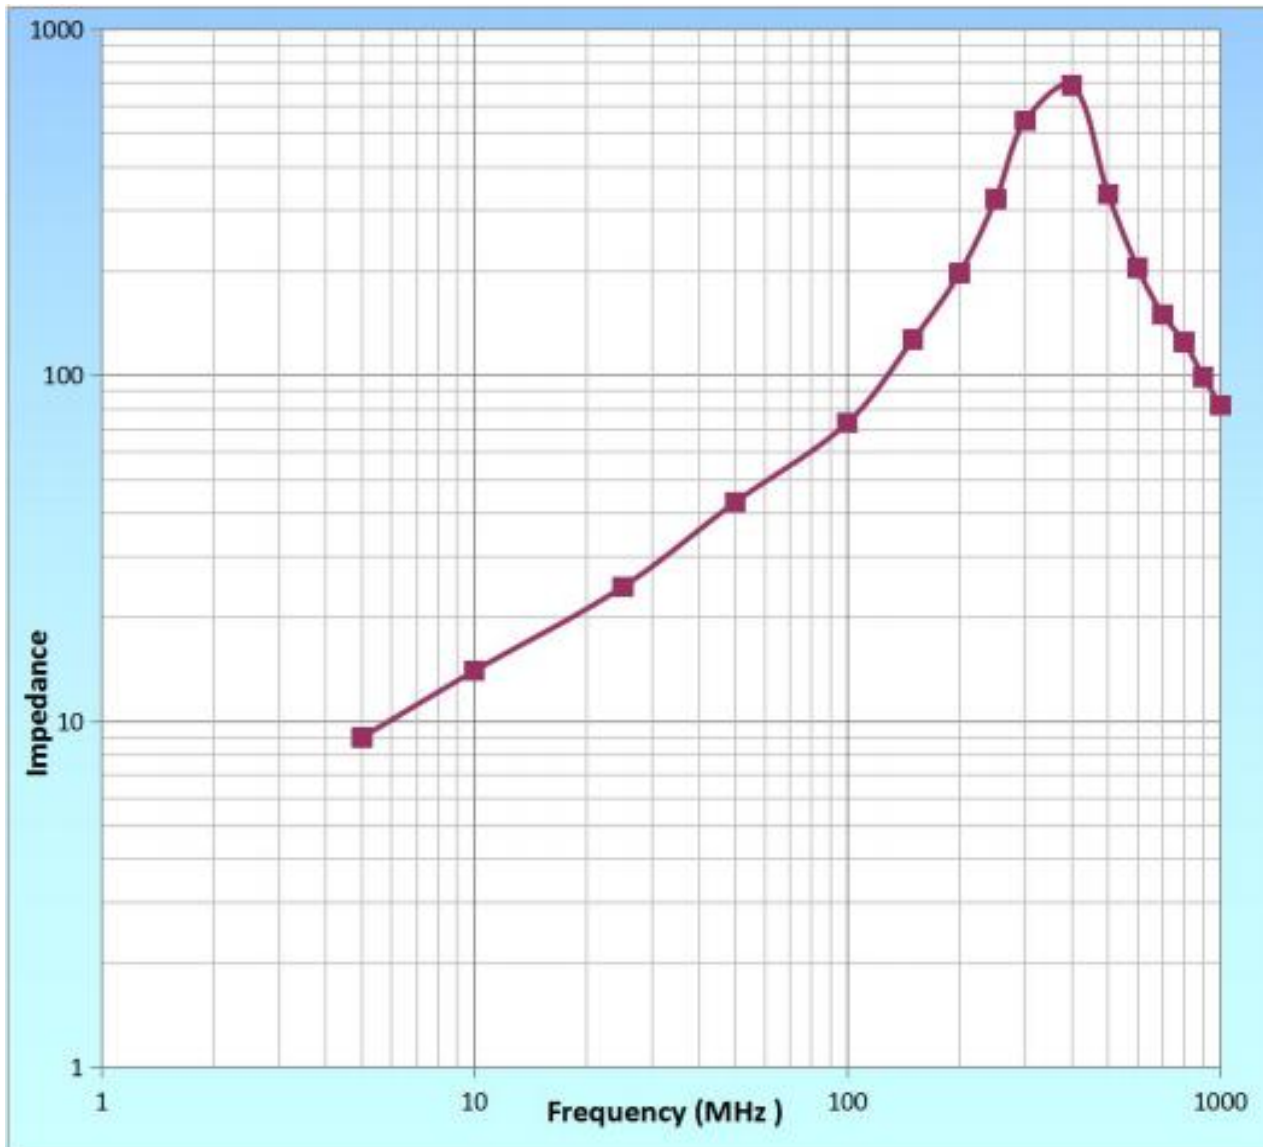

详述give exact information			符合accord with
客户client		表号 second name	3 (1)
品名name of an article	<b>Anti-EMI ferrite core</b>	样品名称 sample name	XRRH3.5* 3.5*1.8
批号batch number			

### 9.检测条件Detection condition

检测仪器：HP-4991A阻抗分析仪； Testing instrument: HP-4991A impedance analyzer.

测试条件：∅ 0.65mm \*120MM 1TS; Test conditions: 0.65mm \* 120mmlts.

温度：25° C 湿度：60%; Temperature: 25° C Humidity: 60%

1	电阻抗Electrical impedance (Ω)		尺寸measure		
deply	在 25MHZ	在100MHZ	外径 (A)	内径 (C)	高度 (D)
规格	20Ω Min	60Ω Min	3.5±0.1	1.8 ±0.2	3.5±0.2
1	20.28	70.12	3.5	1.78	3.51
2	21.28	70.65	3.6	1.75	3.49
3	21.35	71.00	3.54	1.81	3.50
4	21.65	72.56	3.56	1.79	3.51
5	21.98	70.15	3.54	1.86	3.52
6	19.50	71.50	3.57	1.82	3.51
7	20.38	72.40	3.54	1.84	3.51
8	21.0	71.10	3.56	1.75	3.50
9	20.75	72.7	3.54	1.81	3.52
10	22.4	69.8	3.51	1.82	3.52
X/R	22.08/1.4	70.43/3.1	3.52/0.1	1.82/0.03	3.509/0.03