



产品承认书

SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRRH4*10*1.0

我司品名:

OUR PART NAME

Plug-in beads

送样日期:

DATE SAMPLES

数量:

QUANTITY

制造确认 MANUFACTURER APPROVE

拟制 DRAWN	审核 CHECKED	确认 APPROVED
Hu Fangting	Rao Ping	Li Zhenxiong

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION: RH4*10*1.0

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

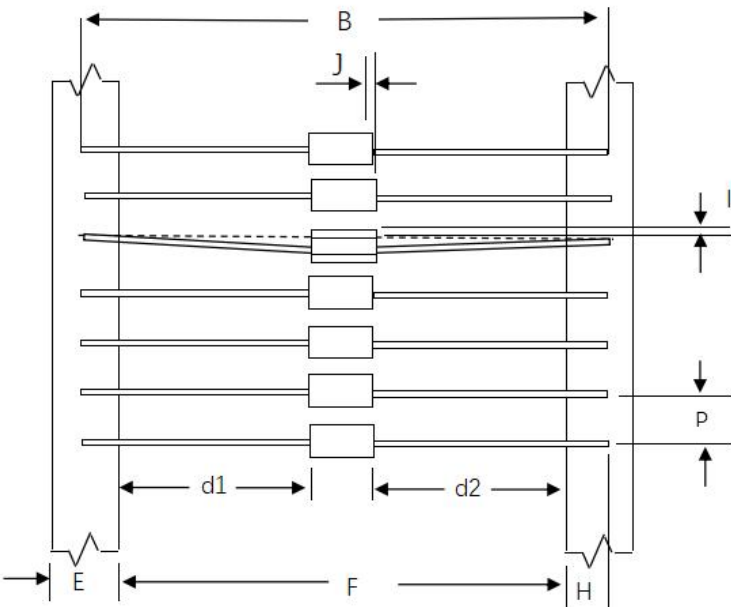
Email: dgxiangru@126.com



产品承认书
SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2024/6/21
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	RH4*10*1.0
我司物料编号 OUR PART NO	XRRH4*10*1.0	我司品名 OUR PART NAME	Plug-in beads

一、MECHANICAL DIMENSIONS(外观尺寸图)：UNIT(单位)：mm(毫米)

	NO	(mm)	(mm)
	B	61.00	±2.0
	E	6.00	±0.5
	F	52.00	±1.5
	H	3.20	MIN
	I	1.35	MAx
	J	1.00	MAx
	P	5.00	±0.5
	P1	0.55	±0.05
	d1-d2	1.20	MAx

二、温度范围 TEMPERATURE RANGE:

1. 工作温度范围 OPERATING TEMPERATURE RANGE: -25℃~+85℃;
2. 储存温度范围 STORAGE TEMPERATURE RANGE: -25℃~+45℃;

三、MATERIAL LIST:

ITEM	SPEC	CONSUMPTION	UNIT	REMARKS
CORE	RH4*10*1.0	1	PCS	
LEADWIRE	CP0.55MM	0.2	g	
GLUE	FK661-7	0.007	g	
PAPER TAPE	SY672 6MM*3000M	5	mm	
ADHESIVE TAPE	SY3064 6MM*3000M	5	mm	

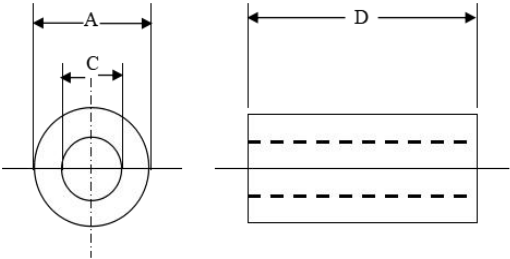



注意事项

Matters needing attention

客户名称 CUSTOMER		日期 DATE	2024/6/21
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	RH4*10*1.0
我司物料编号 OUR PART NO	XRRH4*10*1.0	我司品名 OUR PART NAME	Common mode filter

TESTING DATA:									
	TESTRESOLUTION			DIMENSION (UNIT:mm)					
	Z MHZ	Z1 MHZ	Z2 100MHZ	A	B	C	D	E	F
SPEC	Ω MIN	Ω MIN	100 Ω MIN	4±0.3		1±0.3	10±0.3		
1			114.6	3.48		0.79	10.07		
2			119.6	3.49		0.78	10.09		
3			115.9	3.49		0.82	10.01		
4			117.1	3.49		0.80	10.00		
5			114.4	3.48		0.88	10.05		
MEAN									
R									



SCHEMATIC:


重要控制项Significant controls:
1、产品要求环保、无卤。 The products are required to be environmentally friendly and halogen-free.
2、产品本体无破损、裂纹，不可沾胶等异物。The product body is not damaged, cracked, and must not be stained with glue or other foreign objects.
3、PIN须光亮，不可沾胶，不可有露铜（伤线）、氧化等不良。PIN must be bright, no adhesive, no exposed copper (wire injury), oxidation and other bad.
4、产品尺寸须符合要求。Product dimensions shall be in accordance with the requirements.

产品承认书
SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2024/6/21
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	RH4*10*1.0
我司物料编号 OUR PART NO	XRRH4*10*1.0	我司品名 OUR PART NAME	Plug-in beads

曲线图line graph:

